

PowerDsine[®] Midspans for Cisco[®] IP Telephony



The Optimal solution for Cisco existing infrastructure installations


PowerDsine midspans are the easy, cost-effective way to supply power over existing Cisco infrastructure. PowerDsine eliminates the the cost, time and inconvenience of installing separate power cabling. PowerDsine midspans also are significantly less expensive than upgrading to a PoE switch.

The PowerDsine solution:


- Can reduce installation costs by up to 80%
- Scale from 1-port to 48 ports and more
- Support Gigabit transfer rates
- Provide up to 32W of power



Typical IP Phone deployment with existing Cisco infrastructure

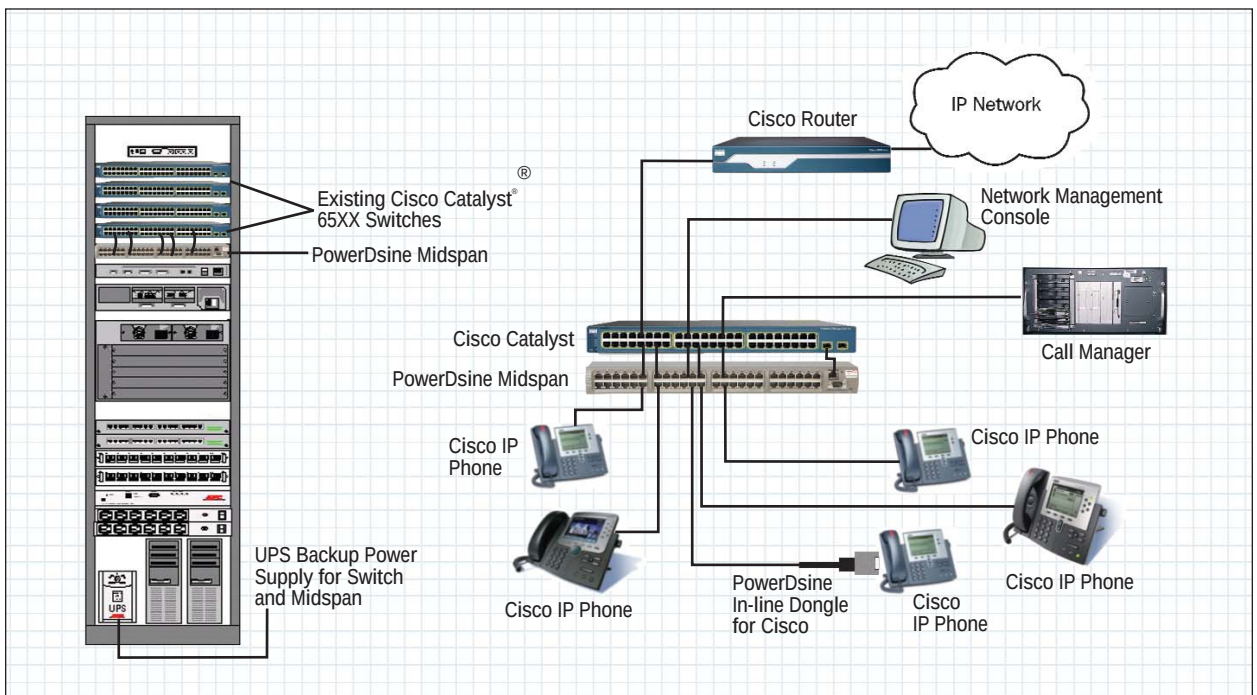

How to connect Cisco pre-standard IP Phones to PowerDsine Midspans

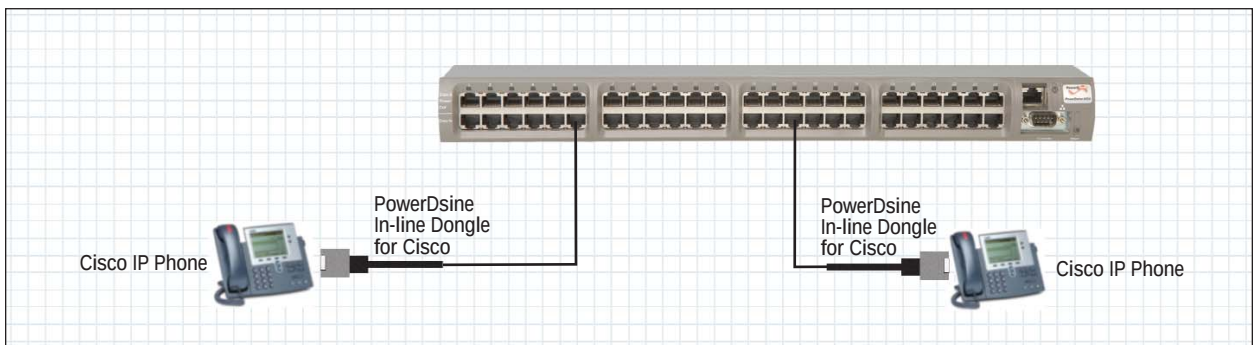

From Cisco's Website:

"Customers are encouraged to migrate to...Cisco Technology Development Partner PowerDsine...for the new IEEE802.af and Cisco pre-standard power schemes."

Cisco Non-PoE Catalyst Switch	PowerDsine Midspans	Cisco IP Phone	802.3af	Splitter P/N
Cisco Blade Switches		7905G	-	
Cisco Catalyst 6500	 6500 Midspan Series Business class PoE Midspans with advanced NMS features and lifetime warranty.	7906G*	✓*	
Cisco Catalyst 6503		7910	-	PD-PS-401/Cisco
Cisco Catalyst 6506		7911G*	✓*	
Cisco Catalyst 6509		7912G	-	
Cisco Catalyst 6509 NEB		7931G*	✓Class3*	
Cisco Catalyst 6513	 7000G Midspan Series High Power Single and Multi-port PoE Midspans delivering up to 32W per port and gigabit speed.	7940G	-	PD-PS-401/Cisco
Cisco Catalyst 4500		7941G	✓	
Cisco Catalyst 4503		7941G-GE*	✓Class3*	
Cisco Catalyst 4506		7942G*	✓Class2*	
Cisco Catalyst 4507R		7945G*	✓Class3*	
Cisco Catalyst 4510R	 6000G Midspan Series Gigabit Business class PoE Midspans with advanced NMS features and lifetime warranty.	7960G	-	PD-PS-401/Cisco
Cisco Stack Switches		7961G	✓	
Cisco Catalyst 3750		7961G-GE*	✓Class3*	
Cisco Catalyst 3560		7962G*	✓Class2*	
Cisco Catalyst 2970G		7965G*	✓Class3*	
Cisco Catalyst 2960	 3500 Midspan Series IEEE 802.3af PoE Midspan for the enterprise, 19" rack mountable.	7970	✓	
Cisco Catalyst 2950		7970G*	✓*	
Cisco Catalyst 500		7975G*	✓*	
		7985G*	✓*	

✓Tested Compliant. * 802.3af Compliant by vendor declaration. For updated information, visit the Microsemi website: www.microsemi.com

Office locations and contact information:

International

Tel: +972-9-7755100
 Fax: +972-9-7755111
PowerDsine@Microsemi.com

India

Tel: +91-22-65529031
India_AMSG@Microsemi.com

North America

Tel: +1-631-756-4680
 Fax: +1-631-756-4691
PowerDsineUSA@Microsemi.com

Corporate Headquarters

Tel: +1-949-221-7100
 Fax: +1-949-756-0308

Europe

Tel: +44 (0) 208-622-3107
 Fax: +44 (0) 208-622-3200
UK_AMSG@Microsemi.com



www.microsemi.com

Copyright © Microsemi Corporation, 2007. Information in this document is subject to change without notice.

Microsemi and PowerDsine are trademarks of Microsemi Corporation. All other trademarks are property of their respective owners. Compatibility between PowerDsine's product and any third party product is based solely on PowerDsine's own testing.